

TESTS RESULT OF THE PROTOTYPE MONITORING SYSTEM FOR THE OPERATING PARAMETERS OF THE POWERED ROOF SUPPORT IN REAL CONDITIONS

Dawid SZURGACZ¹, Konrad TRZOP^{2*}

¹Polska Grupa Górnicza S.A., KWK ROW Ruch Chwałowice

²Polska Grupa Górnicza S.A., KWK Ruda Ruch Bielszowice

Abstract

Monitoring of operating parameters of machines and devices is recently used more often in hard coal mining. This solution is one of the elements of the intelligent mine concept. This concept means that the enterprise uses innovative technologies while considering economic and social factors. The aim of applying practical solutions under the guiding idea is to increase the efficiency of the production line and the safety of the crew's work. The authors propose introducing a system monitoring the geometrical parameters of the powered roof support. The proposed system fits the requirements of creating an intelligent mine, a plant that meets the global safety and efficiency requirements. The article depicts studies of the underground working conditions of the section geometry monitoring system. The tests contributed to determining sensor installation locations and clarifying the geometric parameters of the measurement and recording system. The system is a solution so far not used in Polish hard coal mining at such a highly advanced level. Based on the measurements, the tested system determined the transverse and longitudinal inclinations of the essential elements of the section. In addition, through the designated angles, the working height of the section in the wall excavation was determined.

Keywords: geometry, pressure measurement, monitoring of powered roof support, work safety, work efficiency

1. INTRODUCTION

Several threats characterise the mining industry [1-3]. The hazards are natural and technical [4-6]. Natural hazards result from the prevailing mining and geological conditions, and technical ones result from the improper use of machinery and equipment [7-9]. In order to improve working conditions, innovative system solutions are used [10-12] to monitor the operation of machines and devices [13-15]

*Corresponding author: Polska Grupa Górnicza S.A., KWK Ruda Ruch Bielszowice, Ruda Śląska ul.Halembaska 160, konrad.trzop.kt@gmail.com, 500 351 224

and the environment [16-18]. Monitoring systems are used in a significant number of areas of the mining industry [19-21]. They concern ventilation, tremor and energy and mechanical areas, monitoring gas concentrations, phenomena occurring in the rock mass [22-24] and the proper functioning of machines and devices [25-27].

The specificity of a mining plant's work poses many challenges and barriers to the monitoring systems, such as constraints arising from geology alone, equipment mobility, telecommunications and financial constraints [28-30]. The acquisition in real-time of data from systems, their joint processing, interpretation and control of the entire process are necessary, even critical, conditions for ensuring the crew's safety and the optimal use of assets, energy and other means of production [31-33]. The authors propose to present a monitoring system solution, which is a measuring and recording system of the works of the powered roof support section in the wall excavation [34-36].

The Polish mining industry only monitored the sections of powered roof support, compared to other devices of the wall complex in 2000 [37-39]. The powered roof support's basic task is cooperation with rock mass [40-42]. Properly selected powered roof support affects the proper maintenance of the roof [43-45], which significantly impacts the efficiency and safety of people working in the wall [46-48]. This, in turn, translates into the safety of operating on the wall and the financial results of coal companies [49-51].

A wireless measuring and recording system installed on the basic elements of the powered roof support section was used for the conducted tests of the system operation in underground conditions. The research has yet to include such an innovative approach to monitoring the operation of powered roof supports. The conducted study included preliminary analyses based on the prototypes of sensors monitoring the geometry of the sections on the test stand and tests in real conditions. The research thoroughly monitored the powered roof support section provided on the market [52-54]. Taking into account geometric parameters and changes in the pressure values in the props gave the authors a broader look at the phenomenon of the powered roof support's cooperation with rock mass.

The presented research is the result of many years of analysis and research related to the creation of a measurement and recording system of geometric parameters of the powered roof support. The activities preceding the application of the system in the underground conditions included bench tests, FEM analysis, measurement error levelling, software development and correct interpretation of measurement data [55-57]. After completing these steps, the measurement system was approved for scientific measurements in the extraction wall.

The research in the underground conditions was aimed at reflecting the actual conditions of the system's operation. The main objective was to determine the significance of work monitoring and guidelines for the cooperation of the system with the section of the powered roof support. In this respect, the conducted research provided important information for authors, constructors and users in terms of the location and operation of the monitoring system. The results are a valuable source of data for the implementation of the system to work in real conditions.

2. MATERIALS AND METHODS

In the wall excavation, the installed recording and measurement system consisted of four sensors and one additional sensor equipped with a memory card. The system measured the slopes values based on which the working height of the section in the wall was determined. The sensors were located on the basic elements of the section, i.e. the roof, the floor base, the front lemniscate, the shield (Fig.1). The additional sensor with the memory card was located on the shield. The sensor system communicated wirelessly, using accelerometers in MEMS technology built into the sensors to measure angles. A specially manufactured battery powered the entire system. Battery life was two years.

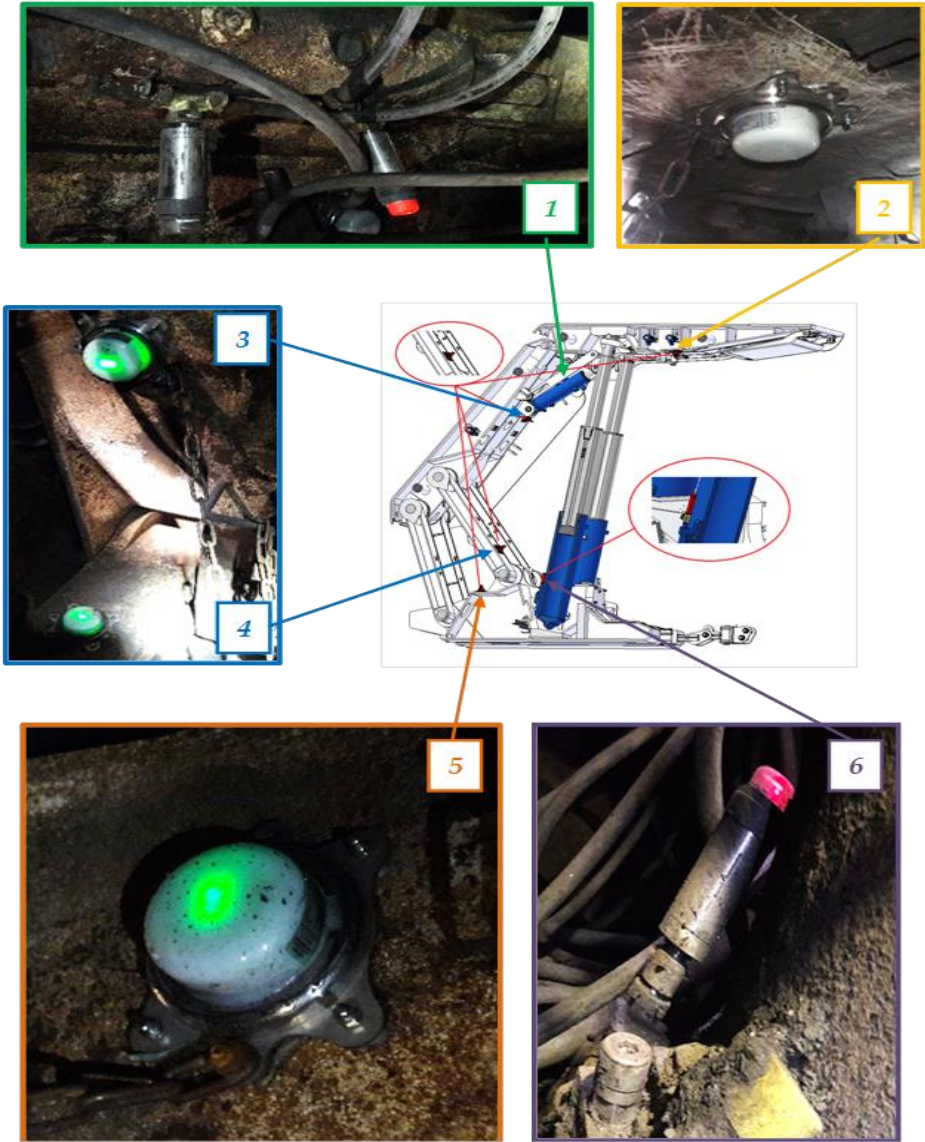


Fig. 1. Underground research stand, where: 1 - hydraulic props sensor, 2 - roof sensor, 3 - shield sensor, 4 - lemniscate sensor, 5 - floor base sensor, 6 - hydraulic leg sensor

The sum of the transverse and longitudinal inclinations was determined using the formula:

$$\sum \lambda = (R_{\alpha} - HL_{\alpha}) + (HP_{\alpha} - SH_{\alpha}) + (L_{\alpha} - F_{\alpha}) \cdot \frac{C}{2} \tag{2.1}$$

where:
 $\sum \lambda$ - the sum of the inclination, [°]

$R\alpha$ – roof inclination, [°]
 $HL\alpha$ – hydraulic leg inclination, [°]
 $HP\alpha$ – hydraulic props inclination, [°]
 $SH\alpha$ – shield inclination, [°]
 $L\alpha$ – lemniscate inclination, [°]
 $F\alpha$ – floor base inclination, [°]
 c – calculation factor constant.

The height was determined based on the measurement of the angles formed between the work of individual elements of the powered roof support in relation to the selected level. We define the level in the software as the point "0" of the initial measurement, i.e. machine levelling. This operation is performed at the beginning of the implementation of the machine with the software. This action lets us obtain a reliable measurement at a moment of machine operation.

The specified angles form the sum of the slope of the powered roof support's components during operation. Using these data, we determine the sum of the transverse and longitudinal slope and the height of the powered roof support in the wall excavation. In the presented (Fig. 2) longwall excavation, a system monitoring the geometric parameters of the powered roof support was installed. Measurements in real conditions allowed us to analyse the variable phases of operation of the powered roof support section and the system's efficiency. The system sensors were located on the essential elements of the powered roof support section, which were determined based on the analysis of strength, geometry and bench tests. The bench analysis allowed us to perform tests using the system prototype in the technological hall to determine individual sensors' communication efficiency. Successful research made it possible to install the system in the mining wall.



Fig. 2. Longwall excavation of the Coal Mine, where: 1 - power roof support, 2 - conveyor, 3 - shearer

Measurement works were carried out in underground conditions, which are classified as complicated in terms of many threats and factors affecting the damage to the measurement system and its communication. The coal bed, in which the wall was located, reached a thickness of 2.55 - 4 m. The inclination of the bed for the analysed wall is from 15° to 20°. The direct footwall and roof of the coal bed 408 consisted of shale. The wall length was ~ 111-242 m, and the depth was ~ 1195 m. The coal

bed was classified as the fourth methane category, the second-degree tremor hazard, the B-class of coal dust explosion hazard and the third category of the gas and rock discharge.

3. RESULTS

In the wall excavation, the installed recording and measurement system consisted of four sensors and one additional sensor equipped with a memory card. The system monitored the work of three selected sections subjected to research. The test stand in the first phase measured for six days. The results of the measurements in Figure 3 show the changes in the height of the total work of the monitored sections.

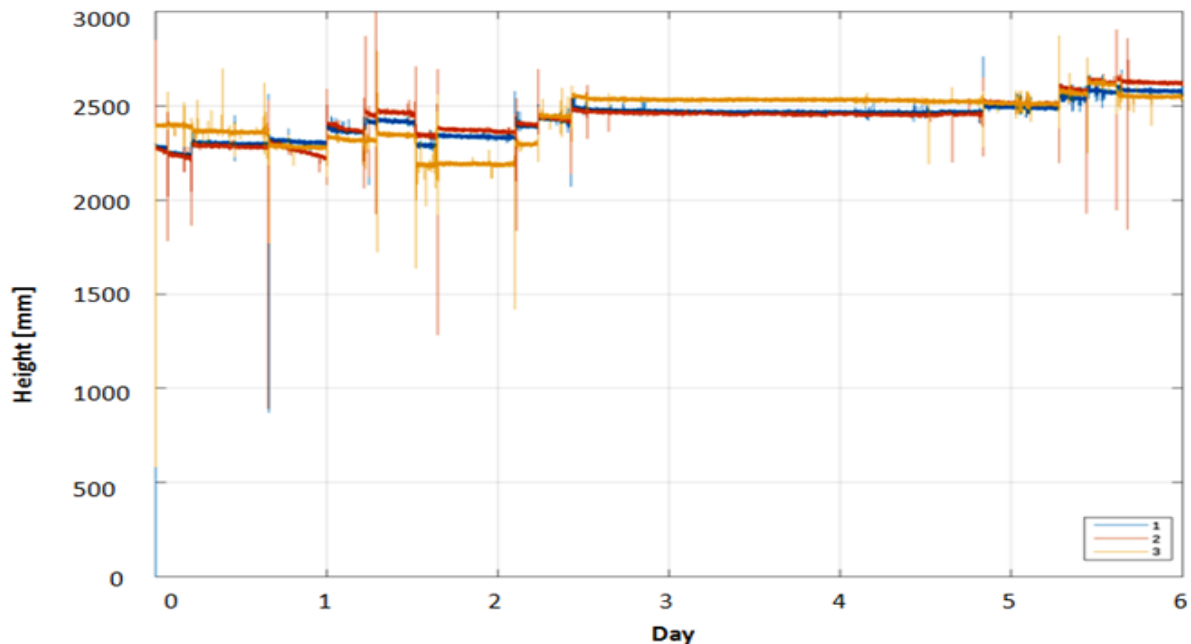


Fig. 3. The height of the three sections tested

In Figure 3, the characteristic changes in height are caused by the given phase of operation of the powered roof support. The powered support performs a movement consisting in lowering the working range, then moving towards the coal bed and moving again lifting. A characteristic feature of this diagram is the similar working height of each support, which proves that the longwall excavation is carried out correctly.

Figures 4 - 7 show the transverse and longitudinal inclinations of the tested elements of the section.

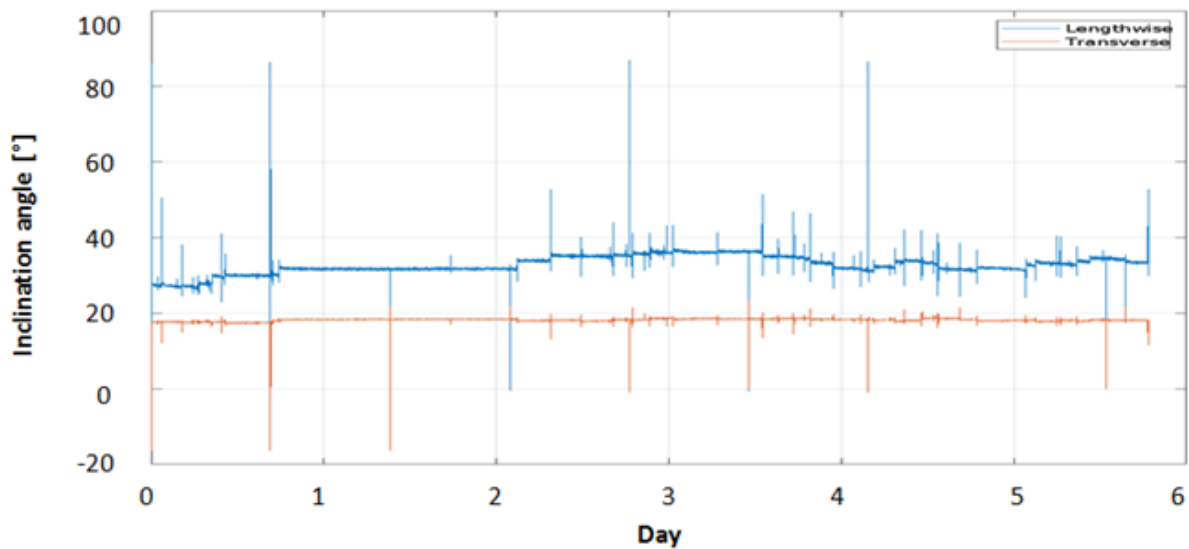


Fig. 4. The transverse and longitudinal inclination of the shield of the tested section

Figure 4 presents the inclination of the infarction shield, which is characterized by a constant value for day 2. This is due to the lack of movement by the example section of the powered roof support. The values of the transverse inclination are approximately 19° , the longitudinal inclination ranges from $29 - 38^\circ$. The highest value of 38° is on the 3rd day of the research.

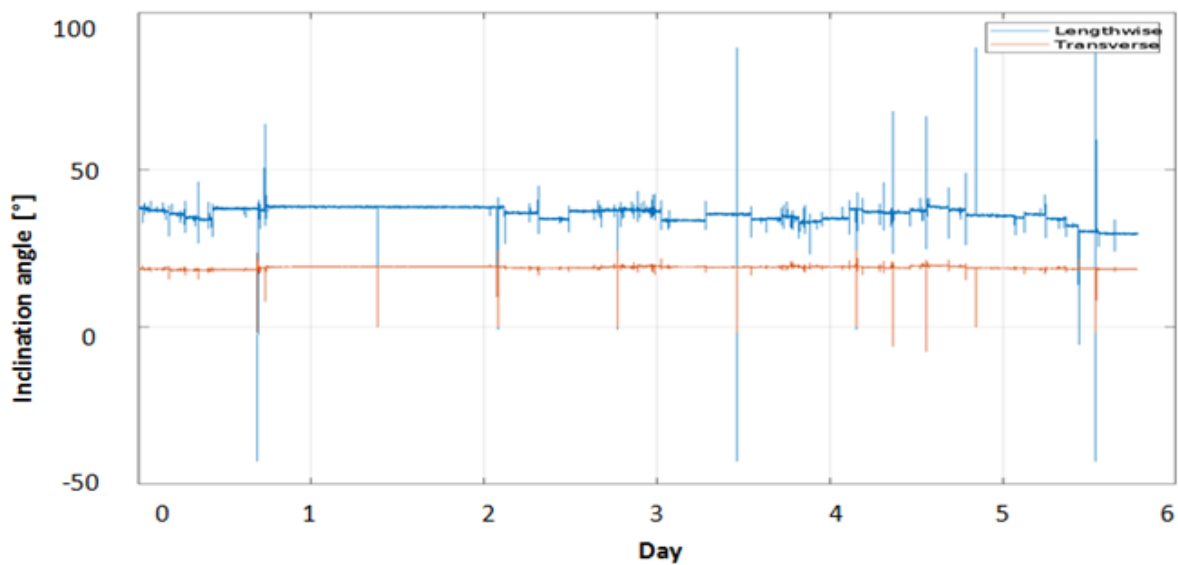


Fig. 5. The transverse and longitudinal inclination of the lemniscate of the tested section

Figure 5 presents the inclination of the lemniscate, which is characterized by a decrease in the longitudinal inclination angle for day 3. This is due to the movement of the casing during the mining process. The

lowering of the casing and the shift towards the coal bed generates a greater angle of longitudinal inclination for the caving shield, and a lower angle of longitudinal inclination for the lemniscates. The values of the transverse inclination are approximately 20°, the longitudinal inclination ranges from 30 - 45°.

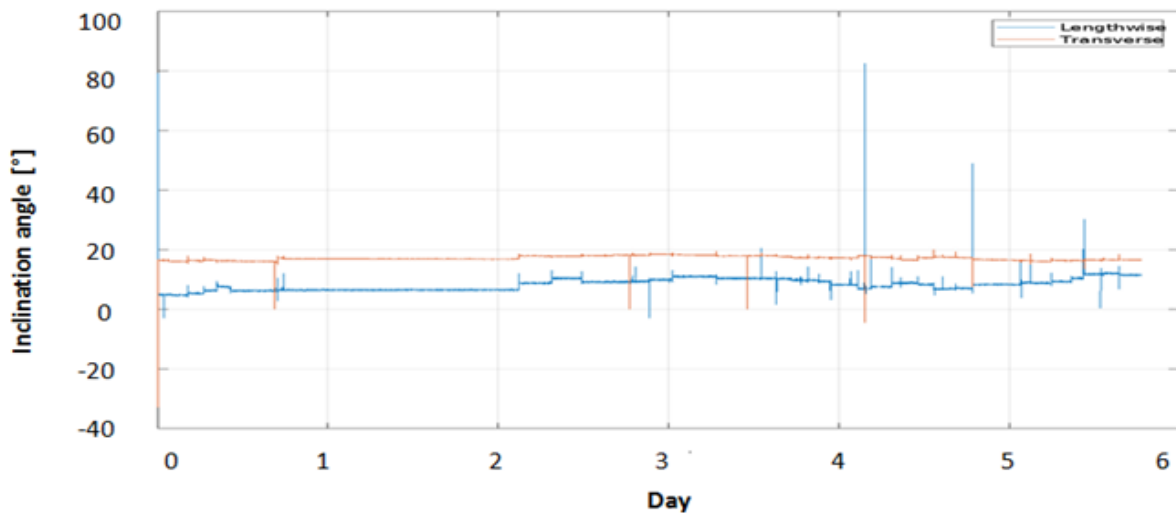


Figure 6. The transverse and longitudinal inclination of the floor base of the tested section

Figure 6 presents the slopes of the floor base, which are characterized by a low variable longitudinal and transverse inclination angle. The operation of the floor base in the longwall working should constitute the 0 support point for the lining in the longwall working. The values of the transverse inclination are approximately 19°, the longitudinal inclination ranges from 8 - 15°.

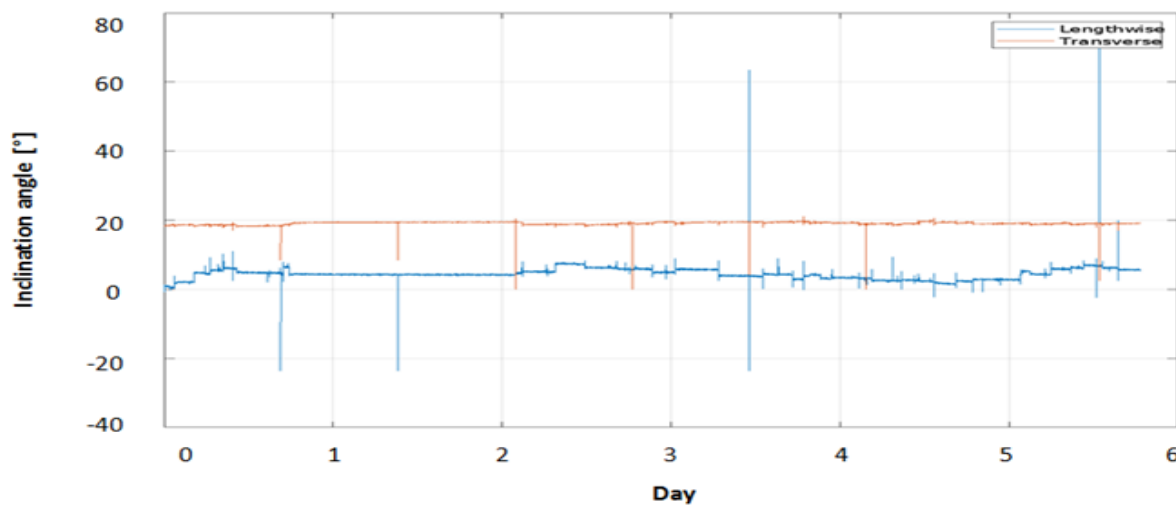


Figure 7. The transverse and longitudinal inclination of the roof of the tested section

Figure 7 presents the slopes of the roof, which are characterized by a low variable longitudinal and transverse inclination angle. The operation of the roof in the longwall working should constitute the 0

support point for the lining in the longwall working. The values of the transverse inclination are approximately 19° , the longitudinal inclination ranges from $8 - 15^\circ$.

The drawings characterize the slopes of individual housing elements. A feature that characterizes these drawings is the reflection of the actual operation of the powered support in real conditions. The element that constitutes the basis for the proper conduct of longwall excavations is maintaining the parallelism of the roof beam in relation to the floor base.

This leads to even coverage of the roof of the excavation and, as a result, reduces the risk of roof rocks falling. A characteristic feature is the cooperation of each element of the casing, which can only be noticed during the installation of the casing and the lemniscate.

Data from measurements are presented in Tables 1 and 2.

Table 1. Longitudinal slope values

Longitudinal						
Floor base [F α°]	Roof [R α°]	Lemniscate [L α°]	Shield [SH α°]	Hydraulic leg [HL α°]	Hydraulic props [HP α°]	The sum of the inclination [$\sum\lambda^\circ$]
4,81	1,25	37,7	27,84	8,6	6,5	12,37
5,06	1,15	38,3	30,2	5,9	5,2	11,66
4,70	0,95	34,27	31,36	5,5	8,3	8,06
5,24	1,3	37,10	33,89	4,6	8,2	8,95
4,95	4,70	35,78	34,79	7,6	10,5	2,69
4,75	1,08	34,80	35,75	7,8	7,3	2,47
4,83	5,13	37,62	34,74	6,4	8,5	3,63
5,03	6,01	36,80	33,22	4,2	10,1	5,55
10,45	3,85	36,07	31,82	10,4	11,6	11,45
9,34	4,27	35,78	32,94	12,9	15,6	9,26
11,74	3,16	30,49	33,35	4,7	8,4	7,57
12,09	6,26	29,42	33,32	13,6	10,6	0,43

Table 2. Transverse slope values

Transverse						
Floor base [Fα°]	Roof [Rα°]	Lemniscate [Lα°]	Shield [SHα°]	Hydraulic leg [HLα°]	Hydraulic props [HPα°]	The sum of the inclination [Σλ°]
16,55	18,32	18,48	17,50	81,8	22,7	28,76
16,07	19,37	18,12	17,46	79,0	24,7	24,51
17,23	18,77	18,33	17,64	76,4	24,6	25,05
16,85	18,69	19,12	17,39	76,5	22,2	27,04
16,78	19,06	18,66	18,33	77,8	25,6	24,15
16,77	19,24	19,03	18,08	79,0	27,0	24,48
18,09	19,22	18,97	18,09	73,0	31,0	20,75
18,15	18,83	19,16	18,49	72,1	36,3	17,89
17,32	19,36	19,57	18,31	62,4	32,4	14,22
17,43	19,21	18,69	17,85	64,6	23,2	19,76
16,66	19,11	18,72	16,60	62,6	24,6	18,67
16,61	19,14	18,46	18,17	66,1	36,7	12,46

The basic inclinations of the powered roof support's elements, which are illustrated by the data from Tables 1 and 2, are obtained directly from the measurement-recording system installed on the test stand. The measurements are the basis for determining the working height of the powered roof support and determining the sum of the slope. Figure 8 shows the sums of the transverse and longitudinal inclinations of the examined section.

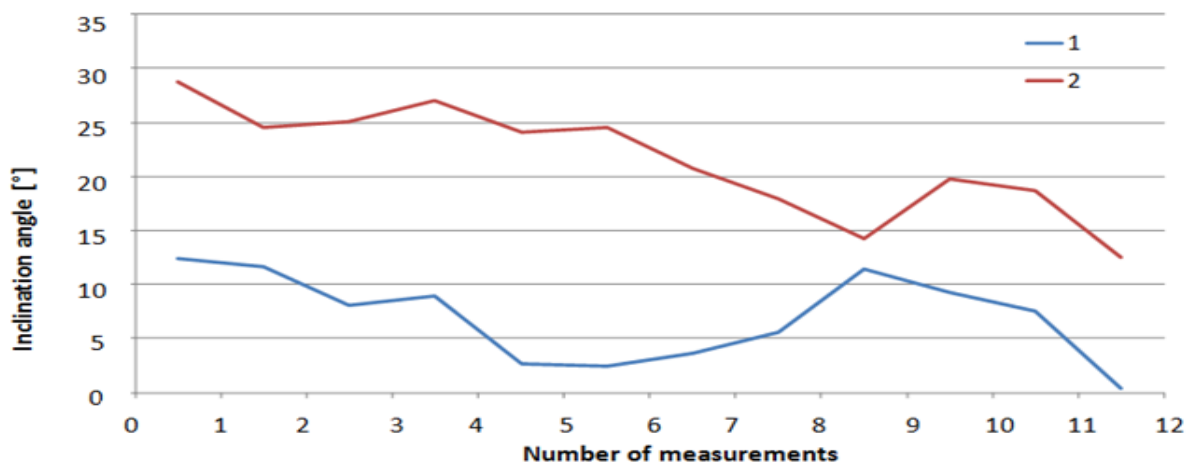


Fig. 8. Graph of the sum of the transverse and longitudinal inclinations of the tested sections, where: 1- sum of the longitudinal slope, 2- sum of the transverse slope

The sum of the transverse and longitudinal inclinations constitutes a reference to the increasing height of the support work in the longwall excavation. The method of controlling the casing to obtain height generates a decrease in transverse and longitudinal inclinations for the operation of the casing elements. It determines the phase of the powered roof support's operation in the space. The inclinations and the designated height of the powered roof support operation show the critical parameters of its operation. Such information constitutes the necessary database for the visualization of the actual operation of the powered roof support in the wall excavation. The operator and the person supervising the work of the powered roof support can use this information to diagnose the correctness of the powered roof support's operation and react to changing mining and geological conditions during the excavation of the wall. This system can also be a supporting tool for departments dealing with the observation of changes occurring in the rock mass and measuring departments of the mine.

4. DISCUSSION

The measurements carried out are a source of information that refers to the prevailing mining and geological conditions in the mining excavation and the efficiency of the powered roof support and the crew. Using the proposed system of monitoring the operation of the powered roof support, it is possible to verify in real time the changes in the conduct of the wall excavation.

During of the powered roof support operation in real conditions, they were not significantly exposed to difficult mining and geological conditions. The system correctly performed measurements of the transverse and longitudinal inclination of the tested elements (Fig. 4-7) and the height of the powered roof support (Fig. 3). Manual measurements were performed at random to confirm the correct operation of the system. In order to enrich the presented research, the system was equipped with pressure monitoring. The authors used pressure monitoring and powered roof support geometry during the analysis. The data made it possible to take a broader look at the phenomenon of powered roof support cooperation with rock mass. Figures 9 and 10 show the variable values of the pressure in the props and the hydraulic leg.

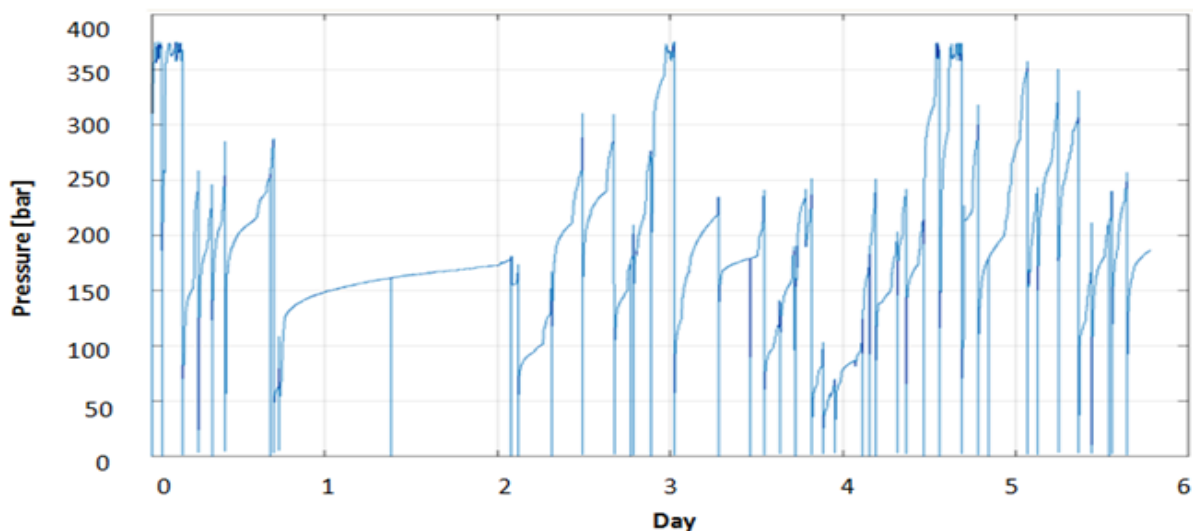


Fig. 9. Pressure value for powered roof support's hydraulic leg

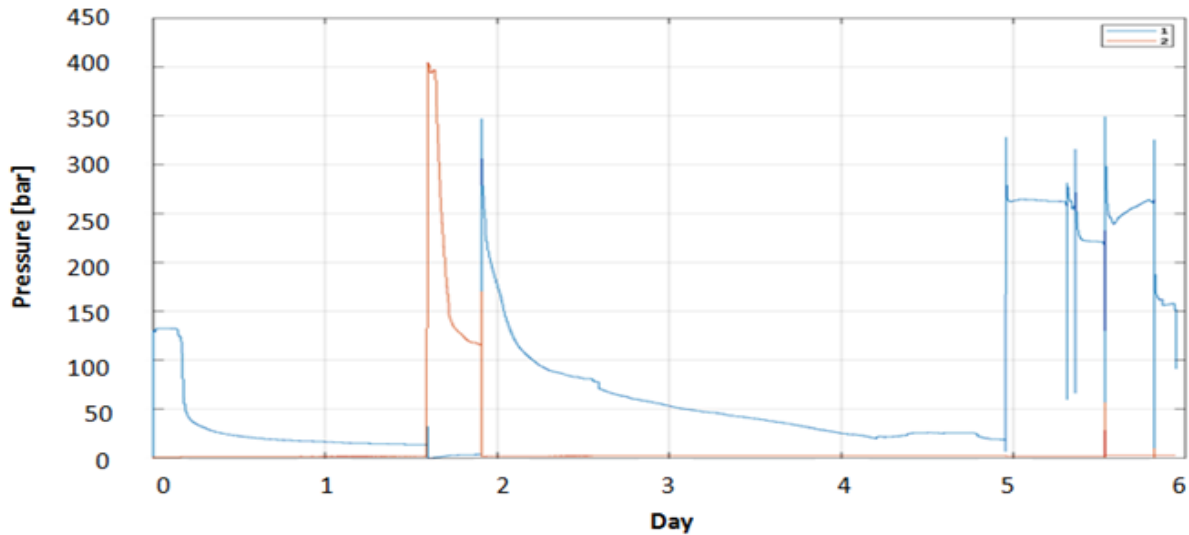


Fig. 10. Pressure value for powered roof support's hydraulic props, where: 1- sub-piston pressure, 2 – over-piston pressure

The value of the pressures in the powered roof support's operation is referred to in the measurements of the powered roof support's operation height. The observation shows that the pressure value variable coincides with the height variable of the powered roof support. This phenomenon depends on the control of the section by the operator, giving the authors values confirming the correct operation of the system. The irregular state of mining and geological conditions, which have a crucial impact on the recorded measurements, is discussed. They are the direction of occurring phenomena in the operation of powered roof support. The human factor, the manner and experience in conducting the wall excavation and section control are worth considering in the measurements made. These factors have a significant impact on the quality of measurements, efficiency, work safety and the economic factor associated with the stops of the wall complex. The stops result from roof rocks collapsing. After determining the height of the powered roof support, the system enabled determining the transverse (Fig. 11) and longitudinal inclinations (Fig.12) of each of the elements on which the sensors were installed.

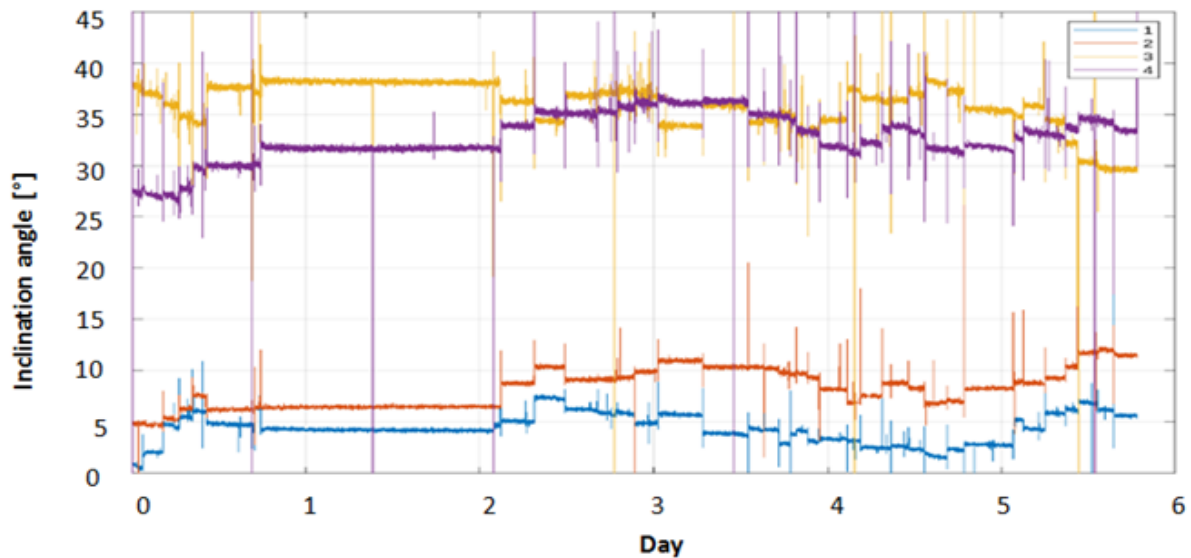


Fig. 11. Transverse inclinations of the basic elements of the powered roof supports, where 1 – roof, 2 – floor base, 3 –lemniscate, 4 – shield

Monitoring the geometric parameters of the section is vital to ensure the stability of the wall excavation and the correct conditions of the powered roof support's cooperation with the rock mass. Under challenging conditions, it may affect the reduction of damage in the elements of the section of the powered roof support. Significant features of the tested system are the possibility of continuous measurement, data transfer to any place and wireless communication between the sensors collecting measurements from individual elements of the section.

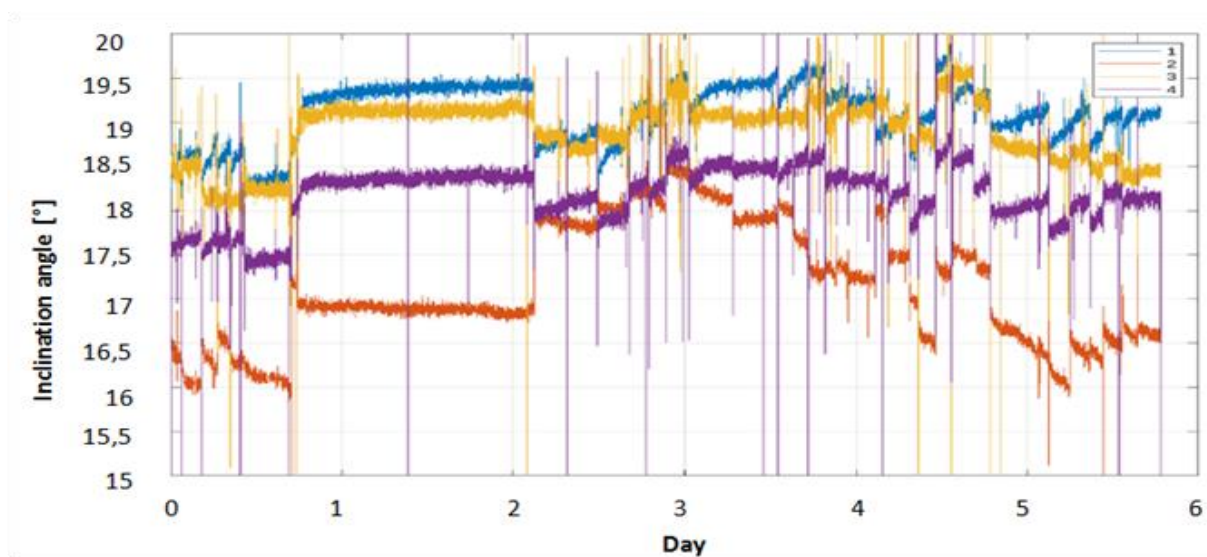


Fig. 12. Longitudinal inclinations of the basic elements of the powered roof supports, where 1 – roof, 2 – floor base, 3 –lemniscate, 4 – shield

Figure 12 shows the variable slopes of the powered roof support section elements in underground conditions during its operation. In order to determine the sum of transverse and longitudinal inclinations, the authors used the proposed formula and data obtained from the measurement and recording system.

The presented drawings reflect the working height of the powered roof support. The values of the slopes are subject to discussion. Does their degree of lowering have a significant impact on the operating height of the housing? After determining the sum of the transverse and longitudinal inclinations, it follows that they have an influence. An additional feature that, according to the authors, should be taken into account in relation to determining the working height of the support is the monitoring of pressure drops for the hydraulic leg and hydraulic props.

5. CONCLUSION

Systems analysing production processes are an indispensable element for maintaining the continuity of hard coal production. Thanks to the introduced optimization packages, monitoring phenomena occurring in mining excavations and monitoring machine parameters in real-time, there is a chance to reduce the accident rate and increase personal safety while improving production processes. The construction of new and updated existing systems for monitoring the production process gives opportunities to compete with other companies related to the mining industry.

The practical application of the system assumed the installation of sensors in the sections of the powered roof support in the wall excavation. The conducted research confirmed the correctness of the designated mounting places for the sensors. sensors, the measurements of which are shown in Figures. The results of the tests are graphs of measurements of the current height of the section (Fig. 3) and a diagram of the sum of the transverse and longitudinal inclination of the powered roof support's elements (Fig. 8).

The tests determined the geometric parameters for the three tested sections, constituting the test stand in underground conditions. The presented graph from the article is a fragment of measurements that, based on correct interpretation, diagnostics and experience, can be used as a tool to predict mechanical phenomena in the operation of the powered roof support and mining and geological phenomena in the excavation of the wall. Ongoing monitoring of the presented parameters will contribute to increasing the efficiency and safety of workers in the mining walls.

The conducted research provided the authors with practical knowledge of the mounting locations of sensors in sections intended for high, medium and low walls. The applied section geometry system is a tool that improves the efficiency and safety of the conducted extraction walls and the operation of the powered roof support. Current monitoring of the geometric parameters of the powered roof support provides users with key information for conducting a wall excavation at a much higher level of advancement. The analysed geometry system is an element that supports broader perspectives for the use of automatic wall complexes.

REFERENCES

1. Patyk, M, Bodziony, P and Krysa, Z 2021. A Multiple Criteria Decision Making Method to Weight the Sustainability Criteria of Equipment Selection for Surface Mining. *Energies* **14**, 3066. <https://doi.org/10.3390/en14113066>

2. Ziętek, B, Banasiewicz, A, Zimroz, R, Szrek, J and Gola, S 2020. A Portable Environmental Data-Monitoring System for Air Hazard Evaluation in Deep Underground Mines. *Energies* **13**, 6331. <https://doi.org/10.3390/en13236331>
3. Ji, Y, Ren, T, Wynne, P, Wan, Z, Zhaoyang, M and Wang, Z 2016. A comparative study of dust control practices in Chinese and Australian longwall coal mines. *Int.J. of Min. Sci. and Tech.***25**(5), 687-706.
4. Kumar, R, Singh, AK, Mishra, AK and Singh, R 2015. Underground mining of thick coal seams. *Int.J. of Min. Sci. and Tech.***25**(6), 885-896.
5. Prostański, D 2017. Empirical Models of Zones Protecting Against Coal Dust Explosion. *Arch. of Min. Sci.***62**(3), pp. 611-619.
6. Pokorný, J, Dlouhá, D and Kucera, P 2016. Study of the necessity of use virtual origin in assessment of selected fire plume characteristics. *MM Sci. J.***5**, 1424–1428.
7. Uth, F, Polnik, B, Kurpiel, W, Baltés, R, Kriegsch, P and Clause, E 2019. An innovate person detection system based on thermal imaging cameras dedicate for underground belt conveyors. *Mining Science* **26**, 263–276. <https://doi.org/10.37190/msc192618>
8. Szurgacz, D, Zhironkin, S, Vöth, S, Pokorný, J, Spearing, AJS, Cehlár, M, Stempniak, M and Sobik, L 2021. Thermal Imaging Study to Determine the Operational Condition of a Conveyor Belt Drive System Structure. *Energies* **14**, 3258. <https://doi.org/10.3390/en14113258>
9. Wang, J and Wang, Z 2019. Systematic principles of surrounding rock control in longwall mining within thick coal seams. *Int.J. of Min. Sci. and Tech.* **29**(1), 591-598.
10. Bazaluk, O, Velychkovych, A, Ropyak, L, Pashechko, M, Pryhorovska, T and Lozynskyi, V 2021. Influence of Heavy Weight Drill Pipe Material and Drill Bit Manufacturing Errors on Stress State of Steel Blades. *Energies***14**, 4198. <https://doi.org/10.3390/en14144198>
11. Doroszuk, B and Król, R 2019. Conveyor belt wear caused by material acceleration in transfer stations. *Mining Science* **26**, 189–201. <https://doi.org/10.37190/msc192615>
12. Krauze, K, Mucha, K, Wydro, T and Pieczora, E 2021. Functional and Operational Requirements to Be Fulfilled by Conical Picks Regarding Their Wear Rate and Investment Costs. *Energies* **14**, 3696. <https://doi.org/10.3390/en14123696>
13. Wodecki, J, Góralczyk, M, Krot, P, Ziętek, B, Szrek, J, Worsa-Kozak, M, Zimroz, R, Śliwiński, P and Czajkowski, A 2020. Process Monitoring in Heavy Duty Drilling Rigs—Data Acquisition System and Cycle Identification Algorithms. *Energies* **13**, 6748. <https://doi.org/10.3390/en13246748>
14. Kotwica, K, Stopka, G, Kalita, M, Bałaga, D and Siegmund, M 2021. Impact of Geometry of Toothed Segments of the Innovative KOMTRACK Longwall Shearer Haulage System on Load and Slip during the Travel of a Track Wheel. *Energies* **14**, 2720. <https://doi.org/10.3390/en14092720>
15. Buyalich, G, Byakov, M, Buyalich, K and Shtenin, E 2019. Development of Powered Support Hydraulic Legs with Improved Performance. *E3S Web Conf.* **105**, 3025.
16. Ji, Y, Zhang, Y, Huang, Z, Shao, Z and Gao, Y 2020. Theoretical analysis of support stability in large dip angle coal seam mined with fully-mechanized top coal caving. *Min. Sci.* **27**, 73–87.
17. Mo, S, Tutuk, K and Saydam, S 2019. Management of floor heave at Bulga Underground Operations – A case study. *Int.J. of Min. Sci. and Tech.***29**(1), 73-78.
18. Klishin, VI and Klishin, SV 2010. Coal Extraction from Thick Flat and Steep Beds. *J. Min. Sci.***46**, 149–159.
19. Góralczyk, M, Krot, P, Zimroz, R and Ogonowski, S 2020. Increasing Energy Efficiency and Productivity of the Comminution Process in Tumbling Mills by Indirect Measurements of Internal Dynamics—An Overview. *Energies* **13**, 6735. <https://doi.org/10.3390/en13246735>

20. Grzesiek, A, Zimroz, R, Śliwiński, P, Gomolla, N and Wyłomańska, A 2021. A Method for Structure Breaking Point Detection in Engine Oil Pressure Data. *Energies* **14**, 5496. <https://doi.org/10.3390/en14175496>
21. Szurgacz, D, Borska, B, Zhironkin, S, Diederichs, R and Spearing, AJS 2022. Optimization of the Load Capacity System of Powered Roof Support: A Review. *Energies* **15**, 6061. <https://doi.org/10.3390/en15166061>
22. Doroszuk, B and Król, R 2019. Analysis of conveyor belt wear caused by material acceleration in transfer stations. *Mining Science* **26**, 189–201. doi:10.5277/msc19261525
23. Bazaluk, O, Slabyi, O, Vekeryk, V, Velychkovych, A, Ropyak, L and Lozynskyi, V 2021. A Technology of Hydrocarbon Fluid Production Intensification by Productive Stratum Drainage Zone Reaming. *Energies* **14**, 3514. <https://doi.org/10.3390/en14123514>
24. Huang, P, Spearing, S, Ju, F, Jessu, KV, Wang, Z and Ning, P 2019. Control Effects of Five Common Solid Waste Backfilling Materials on In Situ Strata of Gob. *Energies* **12**, 154. <https://doi.org/10.3390/en12010154>
25. Kawalec, W, Suchorab, N, Konieczna-Fuławka, M and Król, R 2020. Specific energy consumption of a belt conveyor system in a continuous surface mine. *Energies* **13**(19) doi:10.3390/en13195214
26. Jixiong, Z, Spearing, AJS, Xiexing, M, Shuai, G and Qiang, S 2017. Green coal mining technique integrating mining-dressing-gas draining-backfilling-mining. *Int.J. of Min. Sci. and Tech.* **27**(2), 17–27.
27. Bajda, M, Błażej, R and Hardygóra, M 2018. Optimizing splice geometry in multiply conveyor belts with respect to stress in adhesive bonds. *Mining Science* **25**, 195–206. <https://doi.org/10.5277/msc182514>
28. Zimroz, P, Trybała, P, Wróblewski, A, Góralczyk, M, Szrek, J, Wójcik, A and Zimroz, R 2021. Application of UAV in Search and Rescue Actions in Underground Mine—A Specific Sound Detection in Noisy Acoustic Signal. *Energies* **14**, 3725. <https://doi.org/10.3390/en14133725>
29. Buyalich, G, Buyalich, K and Byakov, M 2017. Factors Determining the Size of Sealing Clearance in Hydraulic Legs of Powered Supports. *E3S Web Conf.* **21**, 3018
30. Bardzinski, P, Jurdziak, L, Kawalec, W and Król, R 2020. Copper ore quality tracking in a belt conveyor system using simulation tools. *Natural Resources Research* **29**(2), 1031–1040. [doi:10.1007/s11053-019-09493-6](https://doi.org/10.1007/s11053-019-09493-6)
31. Bajda M and Hardygóra M. Analysis of Reasons for Reduced Strength of Multiply Conveyor Belt Splices. *Energies* 2021; **14**, 1512. <https://doi.org/10.3390/en14051512>
32. Woźniak, D and Hardygóra, M 2020. Method for laboratory testing rubber penetration of steel cords in conveyor belts. *Mining Science* **27**, 105–117. <https://doi.org/10.37190/msc202708>
33. Janus, J and Krawczyk, J 2021. Measurement and Simulation of Flow in a Section of a Mine Gallery. *Energies* **14**, 4894. <https://doi.org/10.3390/en14164894>
34. Frith, RC 2015. A holistic examination of the load rating design of longwall shields after more than half a century of mechanised longwall mining. *Int.J. of Min. Sci. and Tech.* **26**(2), 199–208.
35. Szurgacz, D, Trzop, K, Gil J, Zhironkin, S, Pokorný, J and Gondek, H 2022. Numerical Study for Determining the Strength Limits of a Powered Longwall Support. *Processes* **10**(3), 527. <https://doi.org/10.3390/pr10030527>
36. Wajs, J, Trybała, P, Górniak-Zimroz, J, Krupa-Kurzynowska, J and Kasza, D 2021. Modern Solution for Fast and Accurate Inventorization of Open-Pit Mines by the Active Remote Sensing Technique—Case Study of Mikoszów Granite Mine (Lower Silesia, SW Poland). *Energies* **14**, 6853. <https://doi.org/10.3390/en14206853>

37. Rajwa, S, Janoszek, T and Prusek, S 2020. Model tests of the effect of active roof support on the working stability of a longwall. *Computers and Geotechnics* **118**, 103302. <https://doi.org/10.1016/j.compgeo.2019.103302>
38. Ralston, JC, Reid, DC, Dunn, MT and Hainsworth, DW 2015. Longwall automation: Delivering enabling technology to achieve safer and more productive underground mining. *Int.J. of Min. Sci. and Tech.* **25(6)**, 865-876.
39. Szurgacz, D 2021. Dynamic Analysis for the Hydraulic Leg Power of a Powered Roof Support. *Energies* **14**, 5715. <https://doi.org/10.3390/en14185715>
40. Stoiński, K and Mika, M 2003. Dynamics of Hydraulic Leg of Powered Longwall Support. *J. Min. Sci.* **39**, 72–77.
41. Hu, S, Ma, L, Guo, J and Yang, P 2018. Support surrounding rock relationship and top coal movement laws in large dip angle Fully mechanized caving face. *Int.J. of Min. Sci. and Tech.* **28(3)**, 533-539.
42. Buyalich, G, Byakov, M and Buyalich, K 2017. Factors Determining Operation of Lip Seal in the Sealed Gap of the Hydraulic Props of Powered Supports. *E3S Web Conf.***41**, 1045.
43. Szurgacz, D, Zhironkin, S, Cehlár, M, Vöth, S, Spearing, S and Liqiang, M 2021. A Step-by-Step Procedure for Tests and Assessment of the Automatic Operation of a Powered Roof Support. *Energies* **14**, 697. <https://doi.org/10.3390/en14030697>
44. Baiul, K, Khudyakov, A, Vashchenko, S, Krot, PV and Solodka, N 2020. The experimental study of compaction parameters and elastic after effect of fine fraction raw materials. *Mining Science* **27**, 7–18. <https://doi.org/10.37190/msc202701>
45. Szurgacz, D, Zhironkin, S, Pokorný, J, Spearing, AJS, Vöth, S, Cehlár, M and Kowalewska, I 2022. Development of an Active Training Method for Belt Conveyor. *Int. J. Environ. Res. Public Health* **19**, 437. <https://doi.org/10.3390/ijerph19010437>
46. Ralston, JC, Hargrave, CO and Dunn, MT 2017. Longwall automation: trends, challenges and opportunities. *Int.J. of Min. Sci. and Tech.* **27(5)**, 733-739.
47. Borkowski, PJ 2020. Comminution of Copper Ores with the Use of a High-Pressure Water Jet. *Energies* **13**, 6274. <https://doi.org/10.3390/en13236274>
48. Gładysiewicz, L, Król, R, Kisielewski, W and Kaszuba, D 2017. Experimental determination of belt conveyors artificial friction coefficient. *Acta Montanistica Slovaca* **22(2)**, 206-214.
49. Hamříková, R and Dlouhá, D 2017. Video tutorials for students of the master's program. *In Proceedings of the 12th Conference Open Education as a Way to a Knowledge Society*, pp. 446–451.
50. Dlouhá, D and Hamříková, R 2019. Our experience with the involvement of students in the creation of study materials. *In Proceedings of the 17th Conference on Applied Mathematics (APLIMAT 2019)***1**, pp. 301–308
51. Dlouhá, D and Hamříková, R 2018. Interactive distance materials of mathematics for VŠB-TU Ostrava. *In Proceedings of the 13th Conference Overcoming the Challenges and the Barriers in Open Education*, pp. 67–72. <https://www.fast.vsb.cz/230/cs/Veda-a-vyzkum/Publikace/2018/>
52. Rajwa, S, Janoszek, T and Prusek, S 2019. Influence of canopy ratio of powered roof support on longwall working stability – A case study. *Int.J. of Min. Sci. and Tech.* **29(4)**, 591-598.
53. Peng, SS, Feng, D, Cheng, J and Yang, L 2019. Automation in U.S. longwall coal mining: A state of the art review. *Int.J. of Min. Sci. and Tech.* **29(2)**, 151-159.
54. Gil, J, Kołodziej, M, Szurgacz, D and Stoiński, K 2019. Introduction of standardization of powered roof supports to increase production efficiency of Polska Grupa Górnicza S.A. *Min. Inform. Autom. Electr. Eng.* **56**, 33–38.

55. Świątek, J, Janoszek, T, Cichy, T and Stoiński, K 2021. Computational Fluid Dynamics Simulations for Investigation of the Damage Causes in Safety Elements of Powered Roof Supports—A Case Study. *Energies* **14**, 1027.
56. Dlouhá, D and Kozlová, K 2019. Knowledge assessment of student's high school mathematics. *In Proceedings of the 17th Conference on Applied Mathematics (APLIMAT 2019)***1**, pp. 243–252.
57. Król, R and Kisielewski, W 2014. Research of loading carrying idlers used in belt conveyor-practical applications. *Diagnostyka* **15(1)**, 67-74.
58. Łuczak, S, Oleksiuk, W and Bodnicki, M. Sensing Tilt with MEMS Accelerometers. *IEEE Sensors Journal* **6(6)**, 1669-1675.
59. Łuczak, S 2008. Pomiar odchylenia od pionu z użyciem akcelerometrów MEMS [Measurement of deviation from the vertical using MEMS accelerometers]. *Pomiary Automatyka Robotyka*, pp. 14-16.